



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>

D 101.11:
11-5820-498-34 P

TM 11-5820-498-34P

UNIVERSITY OF VIRGINIA
ALDERMAN LIBRARY

JAN 4 1991

TECHNICAL MANUAL

GOVERNMENT DOCUMENTS

**DIRECT SUPPORT AND GENERAL SUPPORT
MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)
FOR
RADIO SETS AN/VRC-53, AN/VRC-64, AN/GRC-125
AND AN/GRC-160 AND AMPLIFIER, POWER SUPPLY
GROUPS OA-3633/GRC AND OA-3633A/GRC
(PARTS LIST FOR OA-3633/GRC AND
OA-3633A/GRC, NSN 5820-00-973-3383, ONLY)**

This copy is a reprint which includes current
pages from Change 1.

HEADQUARTERS, DEPARTMENT OF THE ARMY

SEPTEMBER 1976

UNIVERSITY OF VIRGINIA LIBRARY



Digitized by Google



CHANGE }

No. 1 }

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON DC, 27 July 1981

**Direct Support and General Support Maintenance
Repair Parts and Special Tools Lists
(Including Depot Maintenance Repair Parts and Special Tools)
For
RADIO SETS
AN/VRC-53 (NSN 5820-00-223-7467),
AN/VRC-64 (NSN 5820-00-223-7475),
AN/GRC-125 (NSN 5820-00-223-7411),
AND
AN/GRC-160 (NSN 5820-00-223-7473)
AND
AMPLIFIER, POWER SUPPLY GROUPS
OA-3633/GRC AND OA-3633A/GRC
(PARTS LIST FOR OA-3633/GRC AND
OA-3633A/GRC (NSN 5820-00-973-3383) ONLY))
Current as of 6 March 1981**

TM 11-5820-498-34P, 2 September 1976, is changed as follows:

1. Title of the manual is changed as shown above.
2. New or changed material is indicated by a vertical bar.
3. Added or revised illustrations are indicated by a vertical bar before figure number and title.
4. Action change codes indicated in the left-hand margin of the listing page denote the following:
N indicates an added item, C indicates a change in data and R indicates a change in NSN only.
5. Remove and insert pages as indicated below.

*Remove**Insert*

i.....	i/(ii blank)
11 through 14.....	11 through 14
25.....	25/(26 blank)

6. File this change sheet in front of the publication for reference purposes.

By Order of the Secretary of the Army:

Official:

E. C. MEYER
General, United States Army
Chief of Staff

ROBERT M. JOYCE
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-51, Direct and General Support maintenance requirements for AN/VRC-53, AN/VRC-64, AN/GRC-125, AN/GRC-160.

TECHNICAL MANUAL

No. 11-5820-498-34P

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, 2 September 1976

**DIRECT SUPPORT AND GENERAL SUPPORT
MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)
FOR**

RADIO SETS

**AN/VRC-53 (NSN 5820-00-223-7467),
AN/VRC-64 (NSN 5820-00-223-7475),
AN/GRC-125 (NSN 5820-00-223-7411),
AND**

**AN/GRC-160 (NSN 5820-00-223-7473)
AND**

**AMPLIFIER, POWER SUPPLY GROUPS
OA-3633/GRC AND OA-3633A/GRC
(PARTS LIST FOR OA-3633/GRC AND
OA-3633A/GRC (NSN 5820-00-973-3383) ONLY))**

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in back of this manual direct to: Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-ME-MQ, Fort Monmouth, NJ 07703.

In either case, a reply will be furnished direct to you.

*This manual supersedes TM 11-5820-498-35P, 12 April 1972.

Table of Contents

		Page	Illus Figure
SECTION	I. Introduction	1	
	II. Repair parts list	5	
GROUP	00 Radio Sets AN/VRC-53, AN/VRC-64, AN/GRC-125 and AN/GRC-160. (No parts authorized)		
	01 Receiver-transmitter RT-505/PRC-25 (See TM 11-5820-497-35P for parts) and Receiver- Transmitter RT-841/PRC-77 (See TM 11-5820-667-34P for parts)		
	02 Amplifier-Power Supply Group OA-3633/GRC or OA-3633A/GRC	5	1-4
	0201 Amplifier-Power Supply AM-2060/GRC or AM-2060A/GRC	5	1-4
	020101 Connector assembly A1A1	13	5
	020102 Cover assembly A1A2	15	6
	020103 Housing assembly A1A3, Mounting Clamp	17	7-8
	020104 Module assembly A1A4	21	9
	02010401 Terminal board assembly A1A4A1	23	10
	03 Antenna AS-1729/VRC (See TM 11-5985-262-15 for parts)		
SECTION	III. Special tools list (Not applicable)		
	IV. National stock number and part number index	24	

SECTION I INTRODUCTION

1. Scope

This manual lists repair parts and special tools required for performance of direct support and general support maintenance of the OA-3633/GRC and OA-3633A/GRC.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. Section II. Repair Parts List. A list of repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in ascending numerical sequence, with the parts in each group listed in figure and item number sequence.

b. Section III. Special Tools List. Not applicable.

c. Section IV. National Stock Number and Part Number Index. A list, in ascending National item identification number (NIIN, last 9 digits) sequence, of all National stock numbers appearing in the listings, followed by a list, in alphabetic sequence, of all part numbers appearing in the listings. National stock number and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

The following provides an explanation of columns found in the tabular listings:

a. Illustration. This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration in which the item is shown.

(2) *Item number.* The number used to identify each item called out in the illustration.

b. Source, Maintenance, and Recoverability Codes (SMR).

(1) *Source code.* Source codes are assigned to support items to indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code	Definition
PA	Item procured and stocked for anticipated or known usage.
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA, XD, and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

Code	Application/Explanation
O	Support item is removed, replaced, used at the organizational level.
F	Support item is removed, replaced, used at the direct support level.
D	Support items that are removed, replaced, used at depot, mobile depot, specialized repair activity only.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code	Application/Explanation
F	The lowest maintenance level capable of complete repair of the support item is the direct support level.
D	The lowest maintenance level capable of complete repair of the support item is the depot level.
Z	Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability codes	Definition
Z	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
F	Reparable item. When uneconomically repairable, condemn and dispose at the direct support level.
D	Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.
L	Reparable item. Repair, condemnation, and disposal not authorized below depot/specialized repair activity level.

c. National Stock Number. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. Part Number. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications standards, and inspection requirements, to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item.

g. Unit of Measure U/M. Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc.). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

4. Special Information

a. Usable on codes are shown in the description column. Uncoded items are applicable to all models. Identification of the usable on codes used in this publication are:

Code	Used on
5D3	AM-2060A/GRC
5D4	AM-2060/GRC

b. The following publications pertain to the OA-3633/GRC and OA-3633A/GRC and their components:

TM 11-5820-497-35P, Receiver-Transmitter, Radio RT-505/PRC-25

TM 11-5820-498-12, Radio Sets AN/VRC-53, AN/VRC-64, AN/GRC-125, AN/GRC-160 and Amplifier-Power Supply Groups OA-3633/GRC and OA-3633A/GRC

TM 11-5820-498-35, Radio Sets AN/VRC-53, AN/VRC-64, AN/GRC-125, AN/GRC-160 and Amplifier-Power Supply Groups OA-3633/GRC and OA-3633A/GRC

TM 11-5820-667-34P, Receiver-Transmitter AN/PRC-77

TM 11-5985-262-15, Antenna AS-1729/VRC

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the repair part belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the repair part belongs.

(3) *Third.* Identify the repair part on the illustration and note the illustration figure and item number of the repair part.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in ascending NIIN sequence followed by a list of part numbers in ascending alphameric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

(Next printed page is 4)


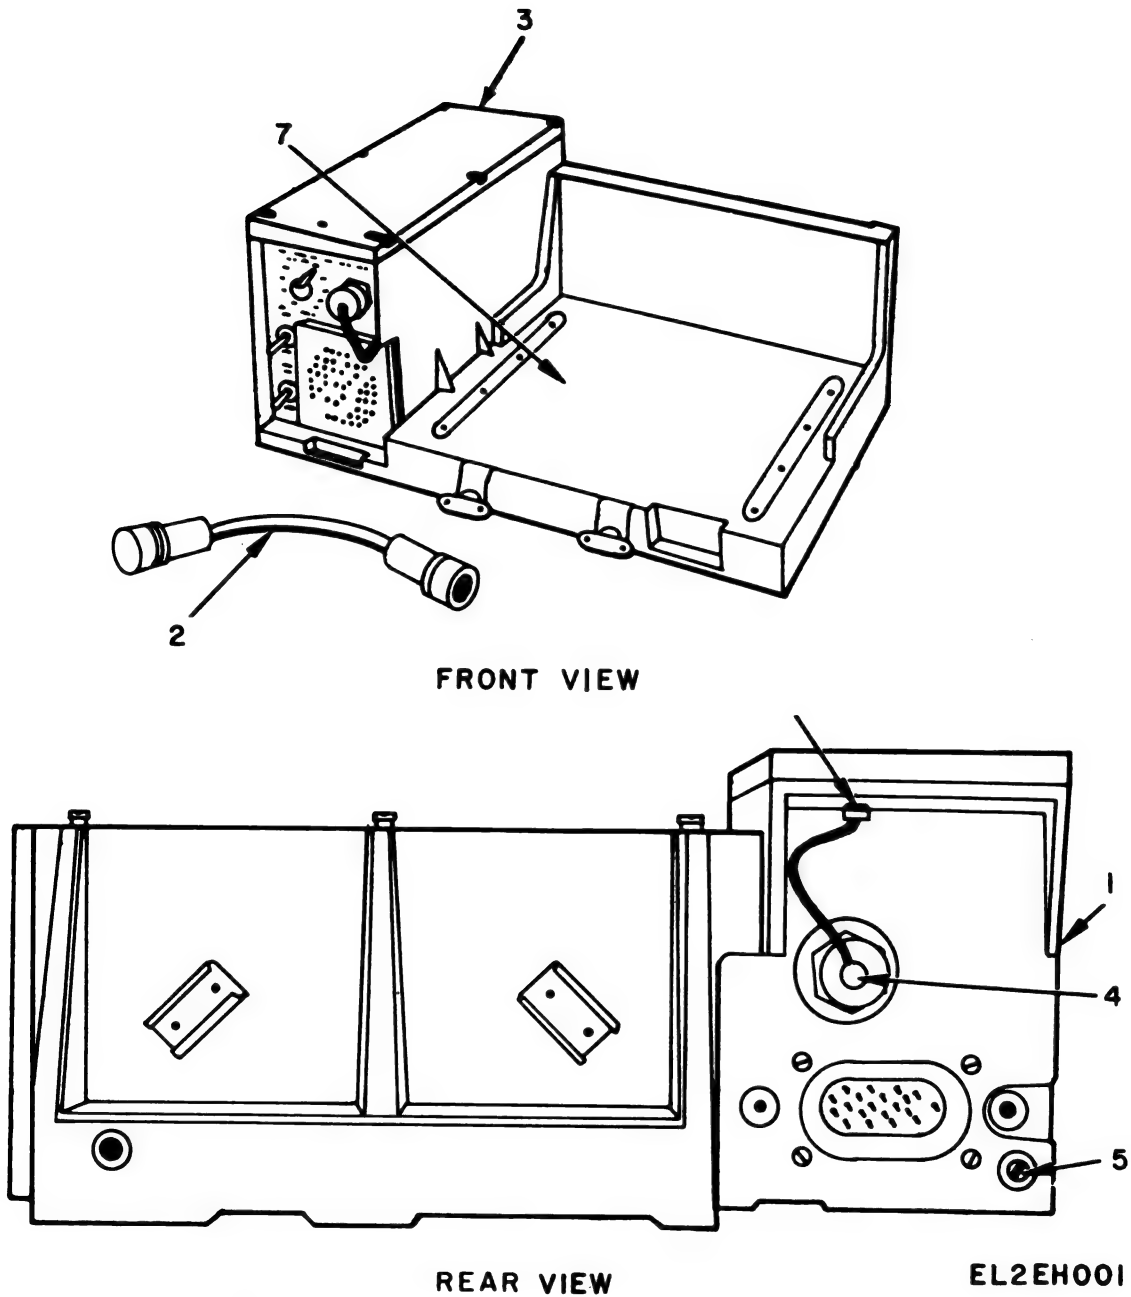


Figure 1. Amplifier-Power Supply Group
OA-3633/GRC or OA-3633A/GRC.

SECTION II

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP: 02 AMPLIFIER-POWER SUPPLY GROUP OA-3633/GRC OR OA-3633A/GRC		
1	1	XD0DD		AM2060AGRC	80058	AMPLIFIER-POWER SUPPLY	EA	1
1	2	PA0ZZ	5995-00-889-1061	CX4655GRC	80058	CABLE ASSEMBLY	EA	1
						GROUP: 0201 AMPLIFIER-POWER SUPPLY AM-2060/GRC OR AM-2060A/GRC		
1	3	XDFFF		SMD454869	80063	COVER ASSEMBLY	EA	1
1	4	PA0ZZ	5999-00-892-8122	SMD454887	80063	CAP, ELECTRICAL	EA	1
1	5	XD0ZZ	5305-00-543-2188	MS35223-32	96906	SCREW, MACHINE, SPECIAL	EA	1
1	6	XDFFZ		SMD454875-8	80063	SCREW, MACHINE, SPECIAL	EA	1
1	7	XDFFF		SMD454865	80063	HOUSING ASSEMBLY	EA	1

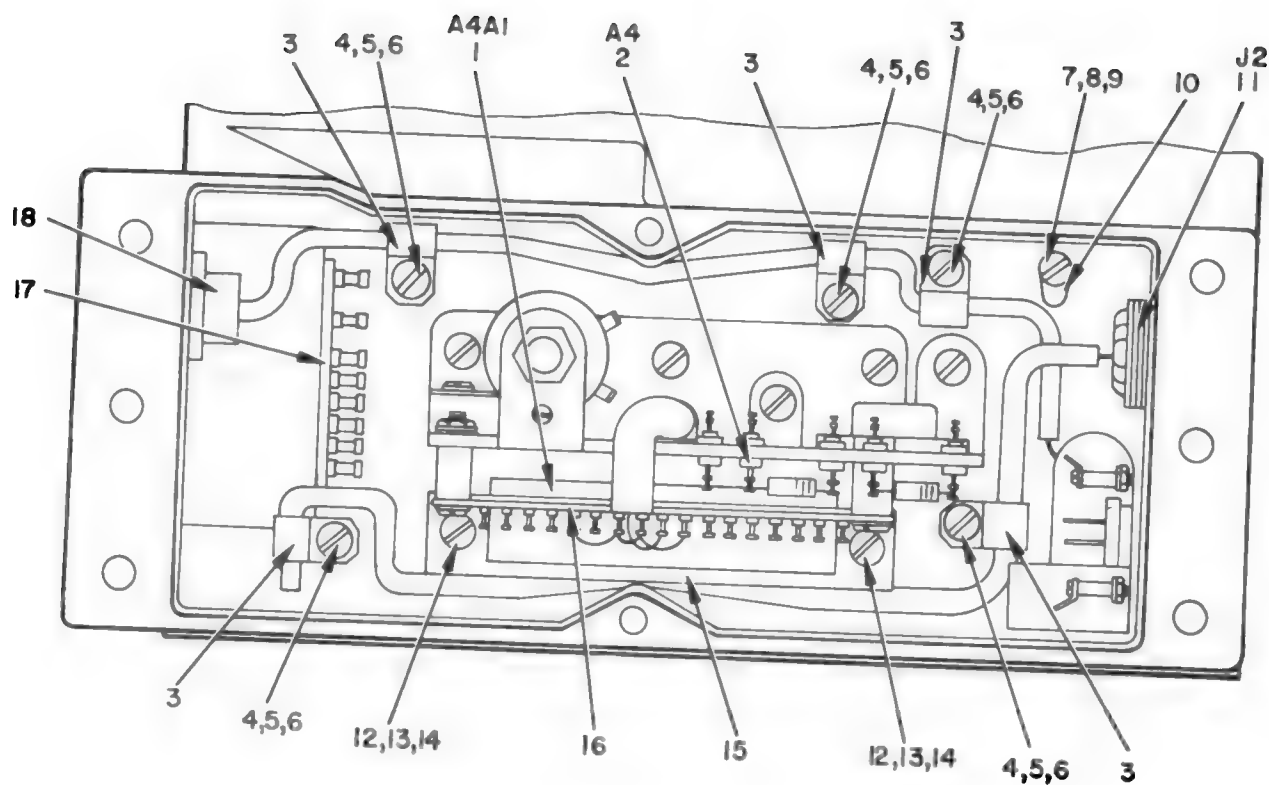


NOTE: FOR COMPLETE REFERENCE
DESIGNATION PREFIX WITH A1

EL2EH002

Figure 2. Amplifier-Power Supply AM-2060/GRC or AM-2060 *A1/GRC*

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
2	1	XDFDL	5820-00-973-1728	SMD454826	80063	TERMINAL BOARD ASSEMBLY	EA	1
2	2	PAFFD	5820-00-444-2328	SMD454805	80063	MODULE ASSEMBLY	EA	1
2	3	XDFZZ		NAS13974	80205	CLAMP, LOOP	EA	5
2	4	XDFZZ		MS35223-43	96906	SCREW, MACHINE, PAN HEAD	EA	5
2	5	XDFZZ	5310-00-809-8544	MS27183-7	96906	WASHER, FLAT	EA	5
2	6	XDFZZ		MS35337-42	96906	WASHER, LOCK	EA	5
2	7	XDFZZ	5305-00-543-2192	MS35223-41	96906	SCREW, MACHINE, PAN HEAD	EA	1
2	8	XDFZZ		MS35337-42	96906	WASHER, LOCK	EA	1
2	9	XDFZZ		AN960PD8L	88044	WASHER, FLAT	EA	1
2	10	XDFZZ		SMB454877	80063	TERMINAL, LUG	EA	1
2	11	PAFZZ	5935-00-892-9119	SMC447928	80063	CONNECTOR, RECEPTACLE, ELECTRICAL	EA	1
2	12	XDFZZ		MS35223-43	96906	SCREW, MACHINE, PAN HEAD	EA	2
2	13	XDFZZ	5310-00-809-8544	MS27183-7	96906	WASHER, FLAT	EA	2
2	14	XDFZZ		MS35337-42	96906	WASHER, LOCK	EA	2
2	15	XDFZZ		SMB454857	80063	BRACKET ANGLE	EA	1
2	16	PAFZZ	5935-00-892-9120	SMD454842	80063	CONNECTOR, RECEPTACLE, ELECTRICAL	EA	1
2	17	XDFFF		SMC146777	80063	CONNECTOR ASSEMBLY	EA	1
2	18	PAFZZ	5935-00-877-2134	SMC454807	80063	CONNECTOR, RECEPTACLE, ELECTRICAL	EA	1

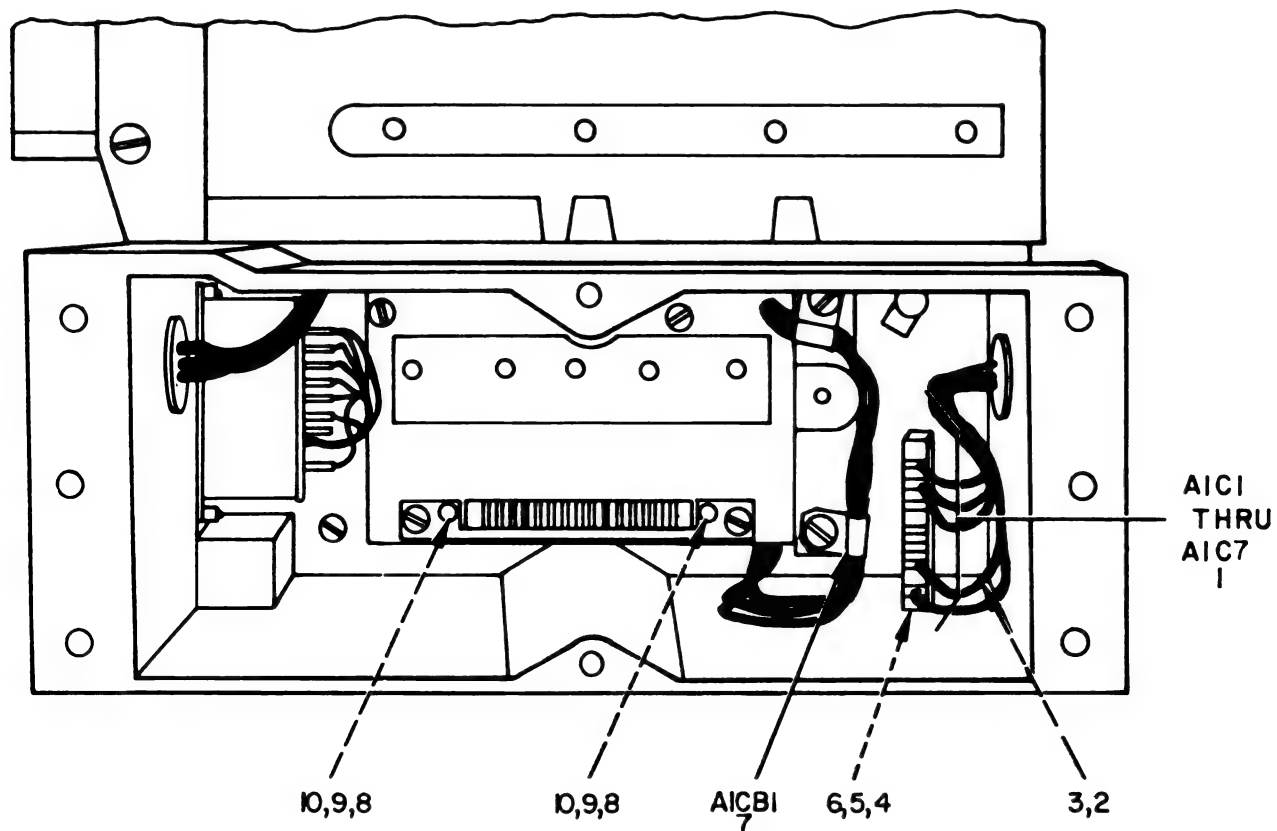


EL2EH003

Figure 3. Amplifier-Power Supply AM-2060/GRC or AM-2060/GRC, Top View
With Cover and Plug-in Removed.

SECTION II

TM11-5870-498-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FBCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
3	1	PAFZZ	5910-00-825-7342	CK62AX222K	81349	CAPACITOR, FIXED, CERAMIC DIELECTRIC	EA	7
3	2	XDFZZ		MS35233-26	96906	SCREW, MACHINE, SPECIAL	EA	1
3	3	XDFZZ	5310-00-616-3555	MS35333-71	96906	WASHER, SPLIT	EA	1
3	4	XDFZZ	5310-00-924-5968	MS25081-1	96906	WASHER, KEY	EA	1
3	5	XDFZZ		SMB454894	80063	WASHER, RUBBER	EA	1
3	6	XDFZZ		SMB454893	80063	WASHER, SPLIT	EA	1
3	7	PAFZZ		SMD454862	80063	CIRCUIT BREAKER	EA	1
3	8	XDFZZ	5310-00-013-4530	MS35649-62	96906	ALT, PLAIN, HEXAGON	EA	2
3	9	XDFZZ	5310-00-082-1404	MS27183-6	96906	WASHER, FLAT	EA	2
3	10	XDFZZ	5310-00-198-3724	MS35337-41	96906	WASHER, SPECIAL	EA	2

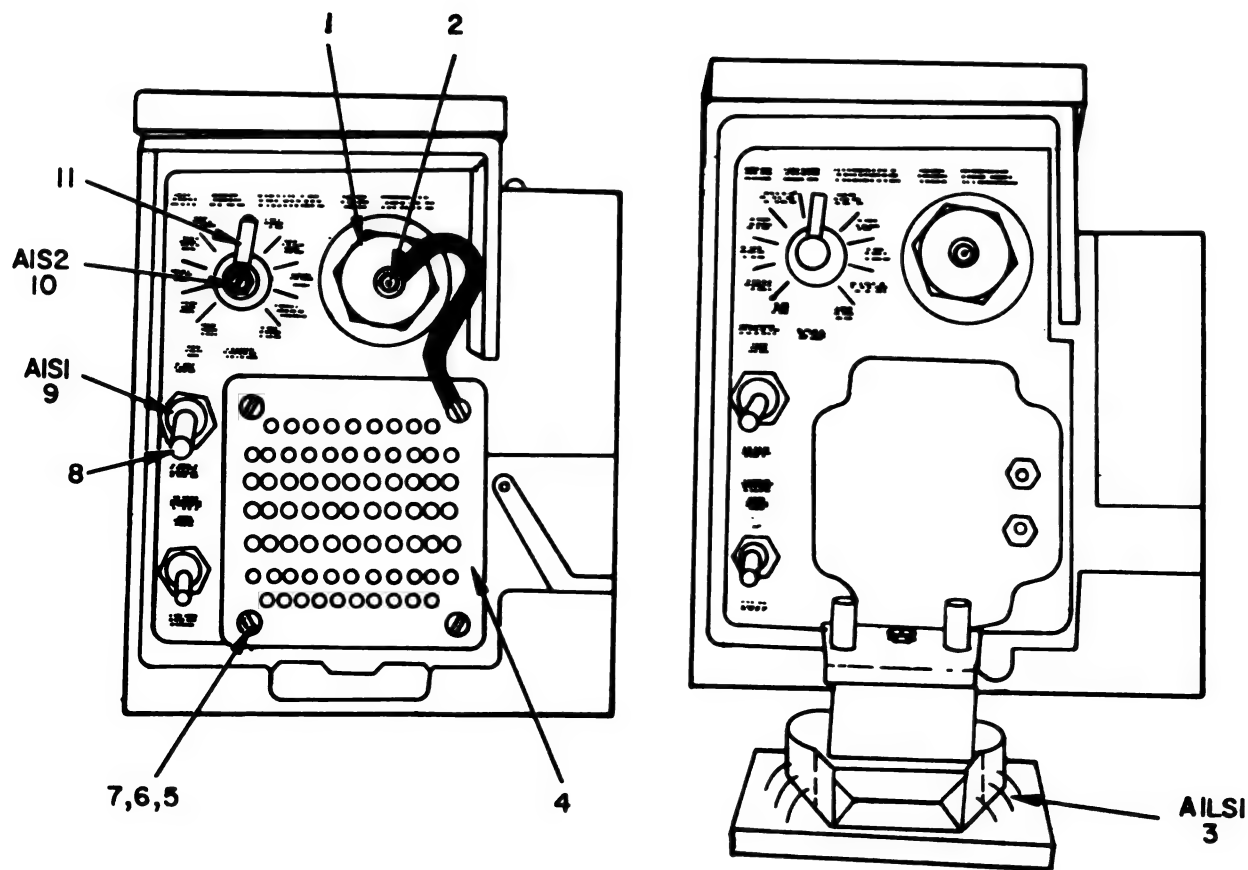


EL2EH004

Figure 4. Amplifier-Power Supply AM-2060/GRC or AM-2060A/GRC, Front Panel.

SECTION II

TM11-5820-498-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
4	1	PAOZZ	5999-00-892-8123	SMB454855	80063	CUST CAP ASSEMBLY	EA	1
4	2	XDOZZ		SMB454875-6	80063	SCREW, MACHINE, SPECIAL	EA	1
4	3	PAFZZ	5965-00-978-8535	SMD454812	80063	SPEAKER	EA	1
4	4	XDFZZ	5965-00-999-4334	SMB454823	80063	COVER, SPEAKER	EA	1
4	5	XDFZZ		MS35223-31	96906	SCREW, MACHINE, SPECIAL	EA	3
4	6	XDFZZ	5310-00-205-8261	SMB454876-2	80063	WASHER, SPECIAL	EA	3
4	7	XDFZZ	5310-00-578-8573	SMB454876-7	80063	WASHER, SPECIAL	EA	3
4	8	PAFZZ	5930-00-689-6786	SMB109142	80063	BOOT SEAL	EA	1
4	9	PAFZZ	5930-00-655-1515	MS35058-23	96906	SWITCH, TOGGLE	EA	1
4	10	PAFZZ	5930-00-980-7244	SMD454814	80063	SWITCH, ROTARY	EA	1
4	11	PAOZZ	5355-00-616-9659	MS91525-1	96906	BAR, KNOB CONTACT	EA	1
11								

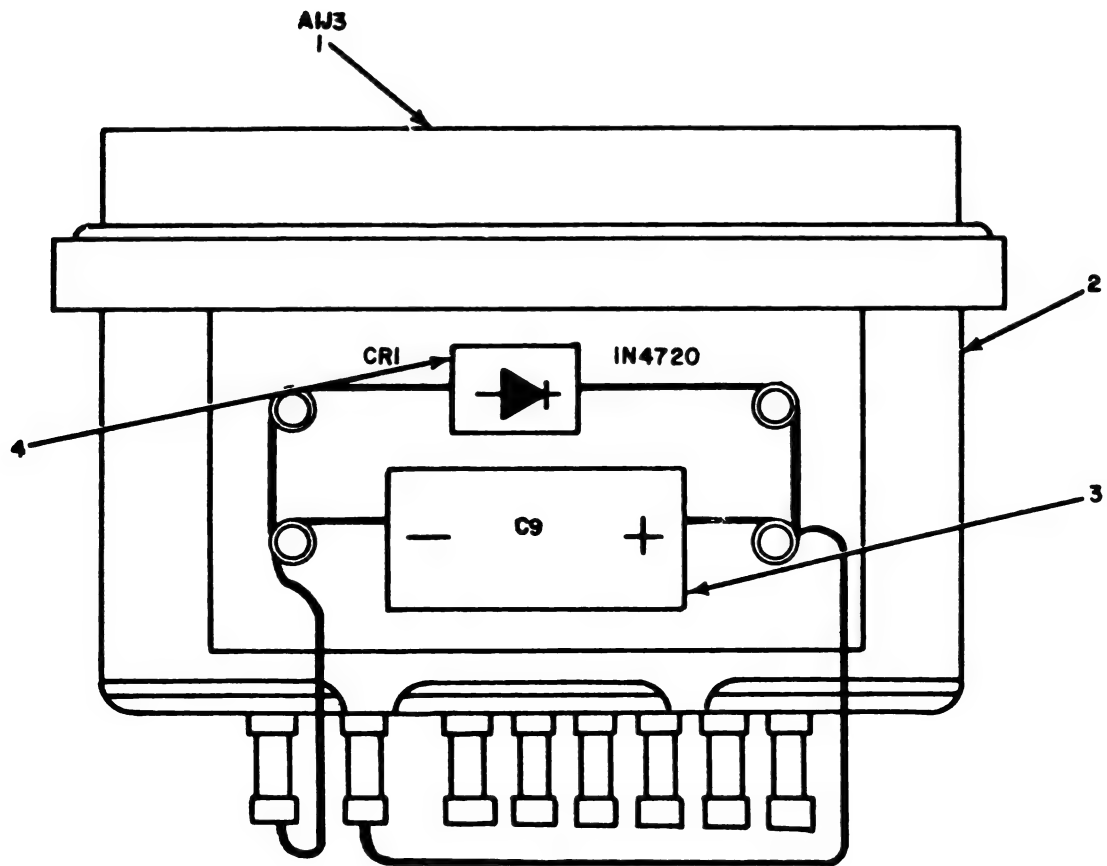

EL2EH011


Figure 5. Connector Assembly A1A1

SECTION II

TM 11-5820-498-34P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 020101 CONNECTOR ASSEMBLY (A1A1)		
5	1	PAFZZ	5935-00-853-6673	SMC454808	80063	CONNECTOR, RECEPTACLE, ELECTRICAL	EA	1
5	2	XDFZZ		SMC146776	80063	CAPACITOR ASSEMBLY	5D3 EA	1
5	3	PAFZZ	5910-00-005-3184	CL65BJ820KPE	81349	CAPACITOR, FIXED, ELECTROLYTIC	5D3 EA	2
5	4	PAFZZ	5961-00-904-2019	1N4720	80131	DIODE	EA	1

Change 1 13

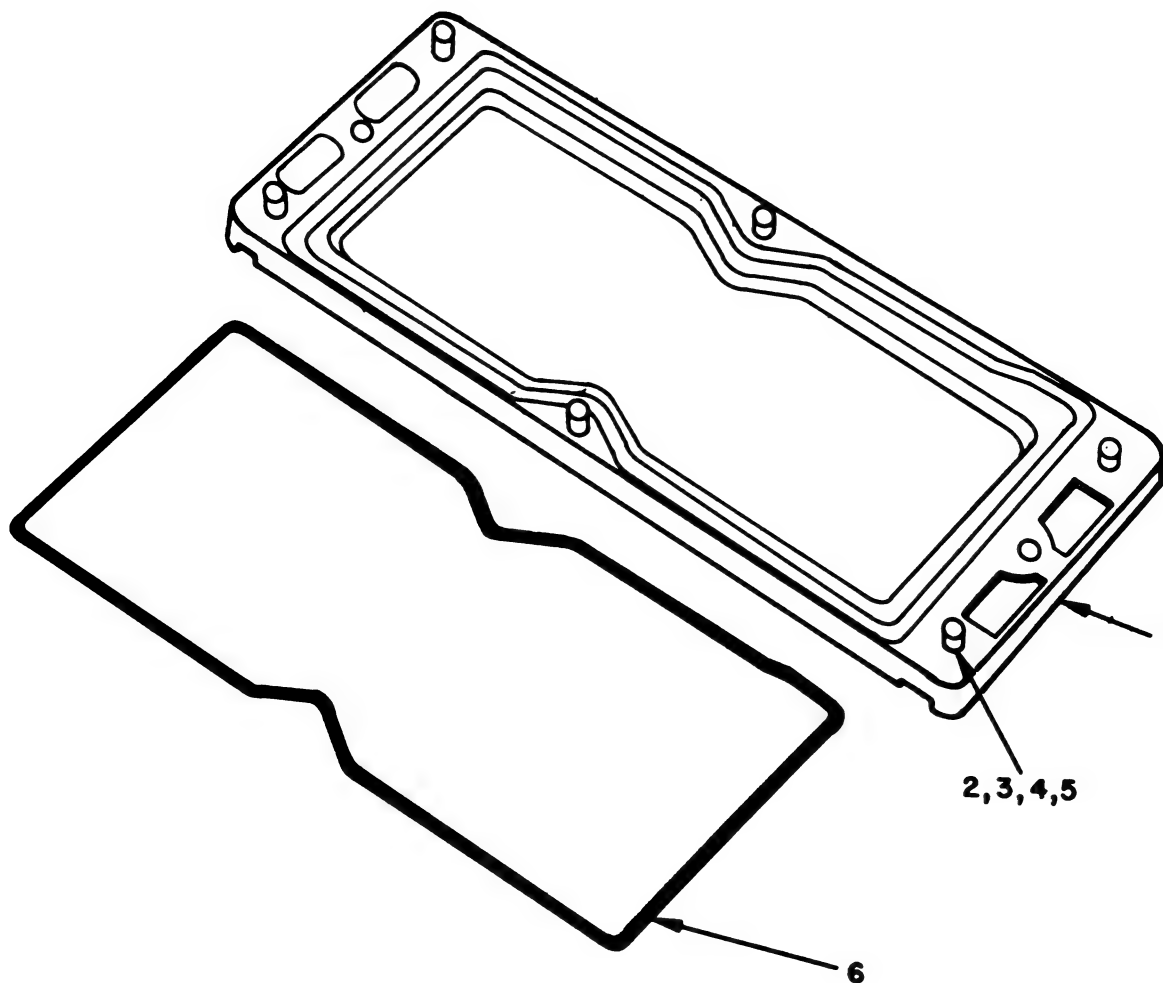

EL2EH006

Figure 6. Cover Assembly (A1A2).

SECTION II

TM11-5820-498-34P

(1)		(2)	(3)	(4)	(5)	(6)	(7)	(8)
ILLUSTRATION		SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	U-M UNIT	QTY INC IN UNIT
(A) FIG NO	(B) ITEM NO							
						GROUP 020102 COVER ASSEMBLY(A1A2)		
6	1	XDFZZ		SMD454864	80063	COVER, AMPLIFIER	EA	1
6	2	XDFZZ		SMB454847-58	80063	RING, RETAINING, RUBBER	EA	6
6	3	XDFZZ	5305-00-889-3060	SMD454878-2	80063	SCREW, EXTERNALLY RELIEVED	EA	6
6	4	XDFZZ		MS35337-43	96906	WASHER, SPECIAL	EA	6
6	5	XDFZZ	5310-00-957-7579	SMB454888	80063	WASHER, FLAT	EA	6
6	6	PAFZZ	5330-00-973-1727	SMD454871	80063	GASKET	EA	1


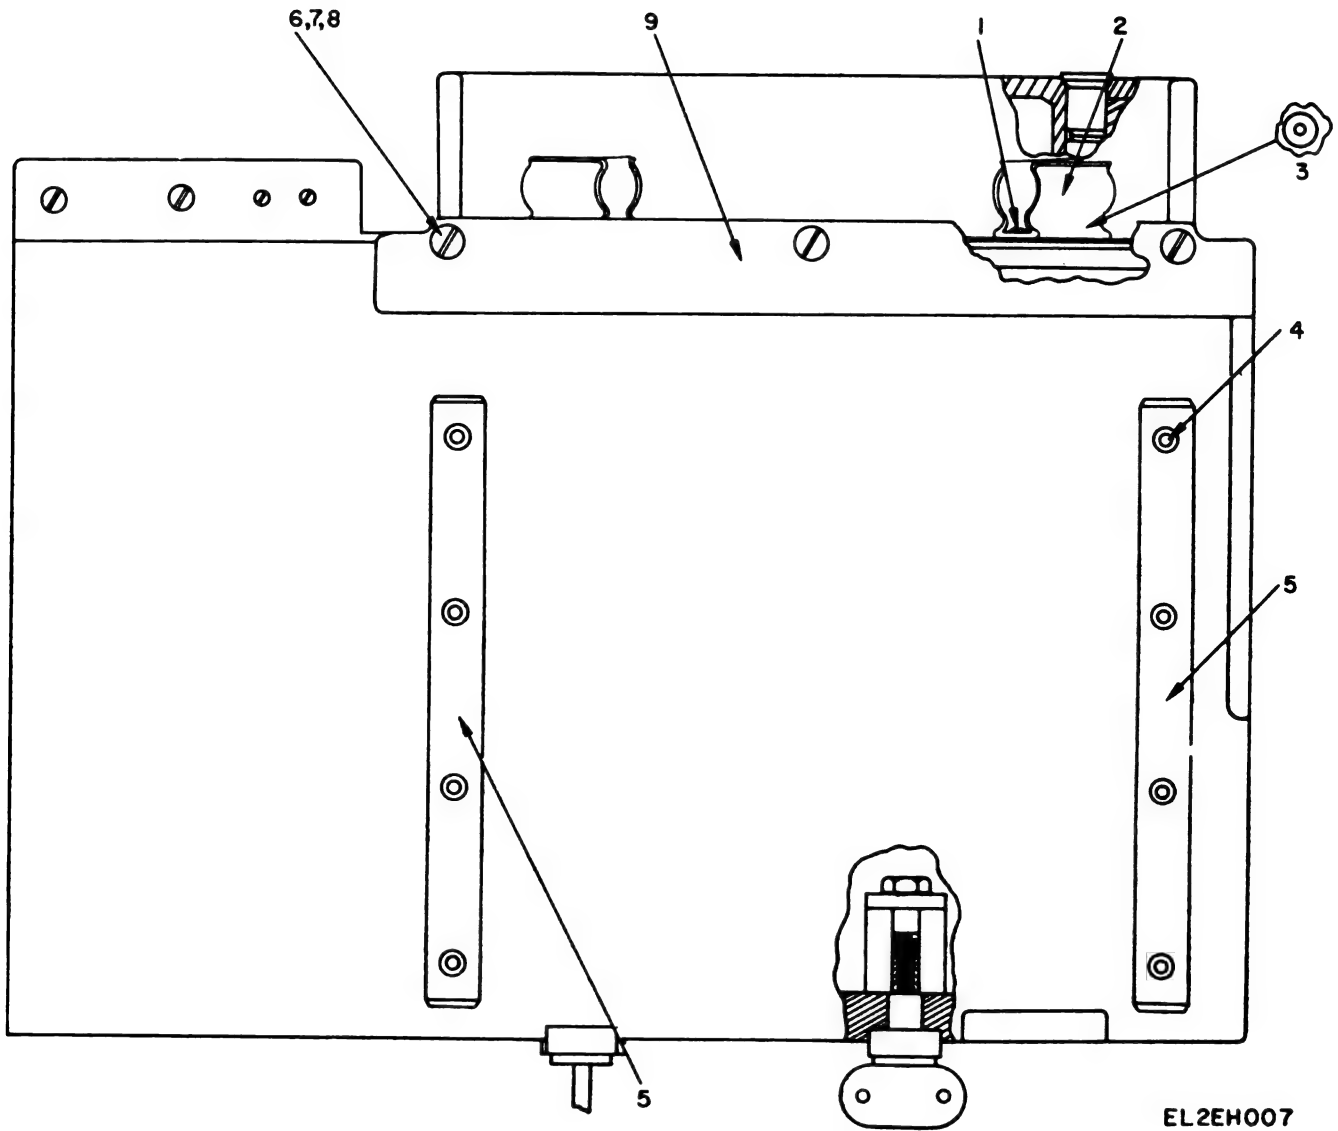


Figure 7. Housing Assembly (A1A3).

SECTION II

TM11-5820-498-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 020103 HOUSING ASSEMBLY (A1A3)		
7	1	XDOZZ	5310-00-205-6261	SMB454876-2	80063	WASHER, SPECIAL	EA	2
7	2	PAOZZ	3120-00-973-1508	SMB447392	80063	STOP	EA	2
7	3	XDOZZ	5310-00-578-8573	SMB454876-7	80063	WASHER, SPECIAL	EA	2
7	4	XDFZZ		SMB454875-7	80063	SCREW, MACHINE, SPECIAL	EA	8
7	5	XDFZZ		SMB454881	80063	ADAPTER PLATE ASSEMBLY	EA	2
7	6	XDFZZ	5305-00-989-6265	SMB454875-5	80063	SCREW, MACHINE, SPECIAL	EA	3
7	7	XDFZZ		SMB454876-4	80063	WASHER, LOCK	EA	3
7	8	XDFZZ		SMB454876-5	80063	WASHER, PLAIN	EA	3
7	9	XDFZZ		SMD454813	80063	PLATE, STEEL	EA	1

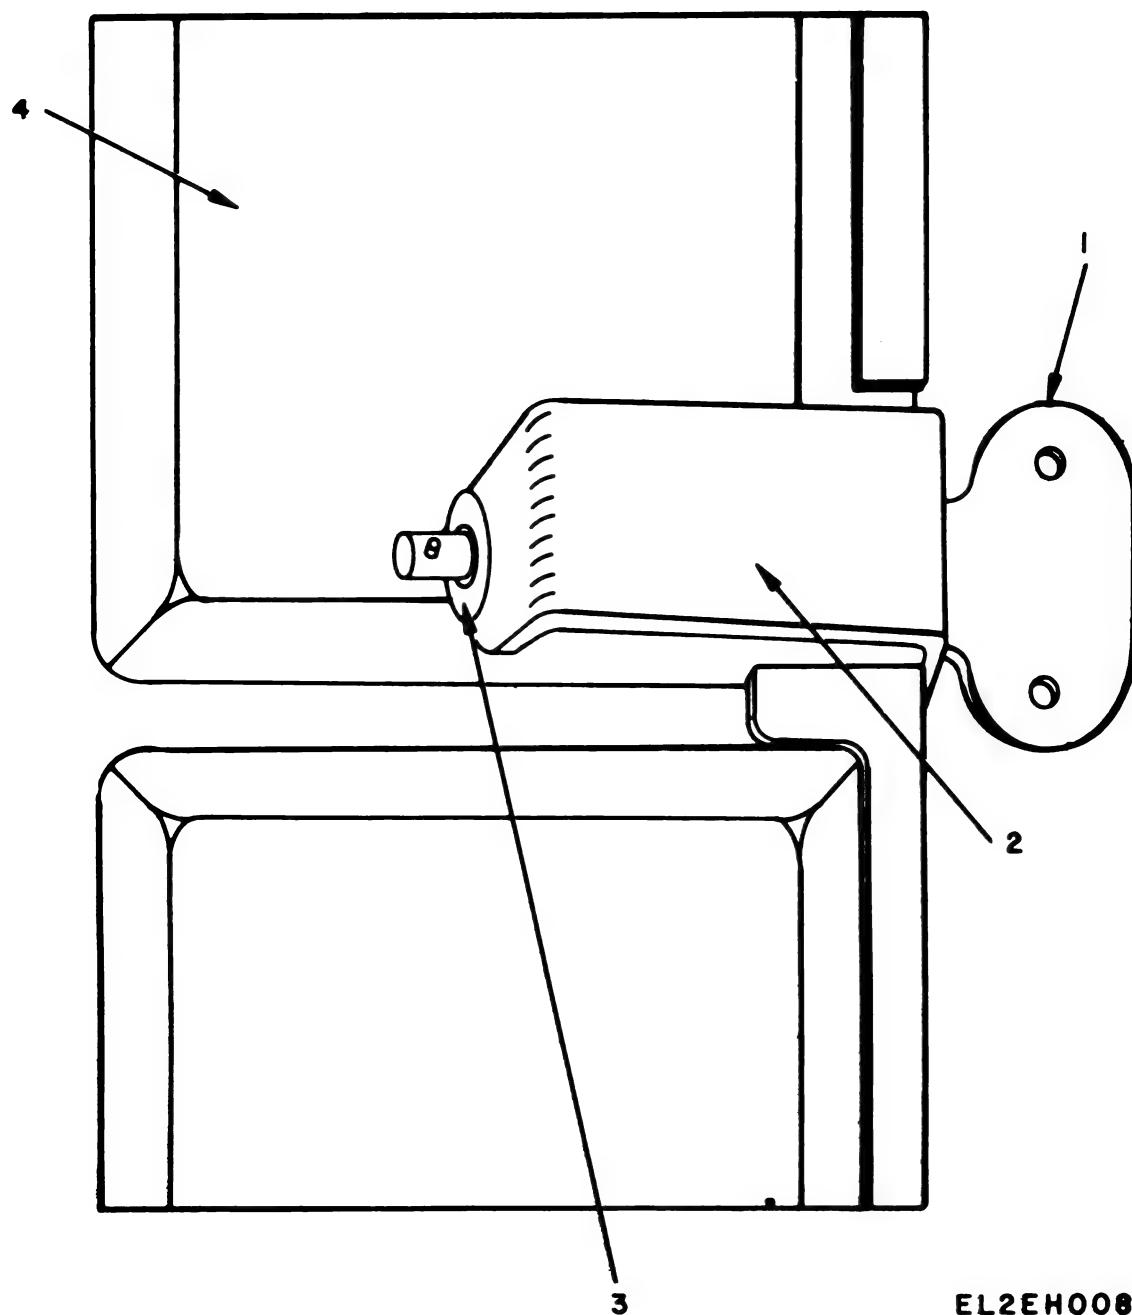


EL2EH008

Figure 8. Housing Assembly (A1A3), Mounting Clamp.

SECTION II

TM11-5820-498-34P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.							
8	1	XDFZZ	5305-00-983-8314	SMC454861	80063	SCREW, MACHINE, SPECIAL	EA	2
8	2	PAFZZ	5340-00-980-7281	SMC454866	80063	CLAMP C	EA	2
8	3	XDFZZ		SMB454876-6	80063	WASHER, PLAIN	EA	2
8	4	XDFZZ		SMC454818	80063	BLM PER PAD	EA	1

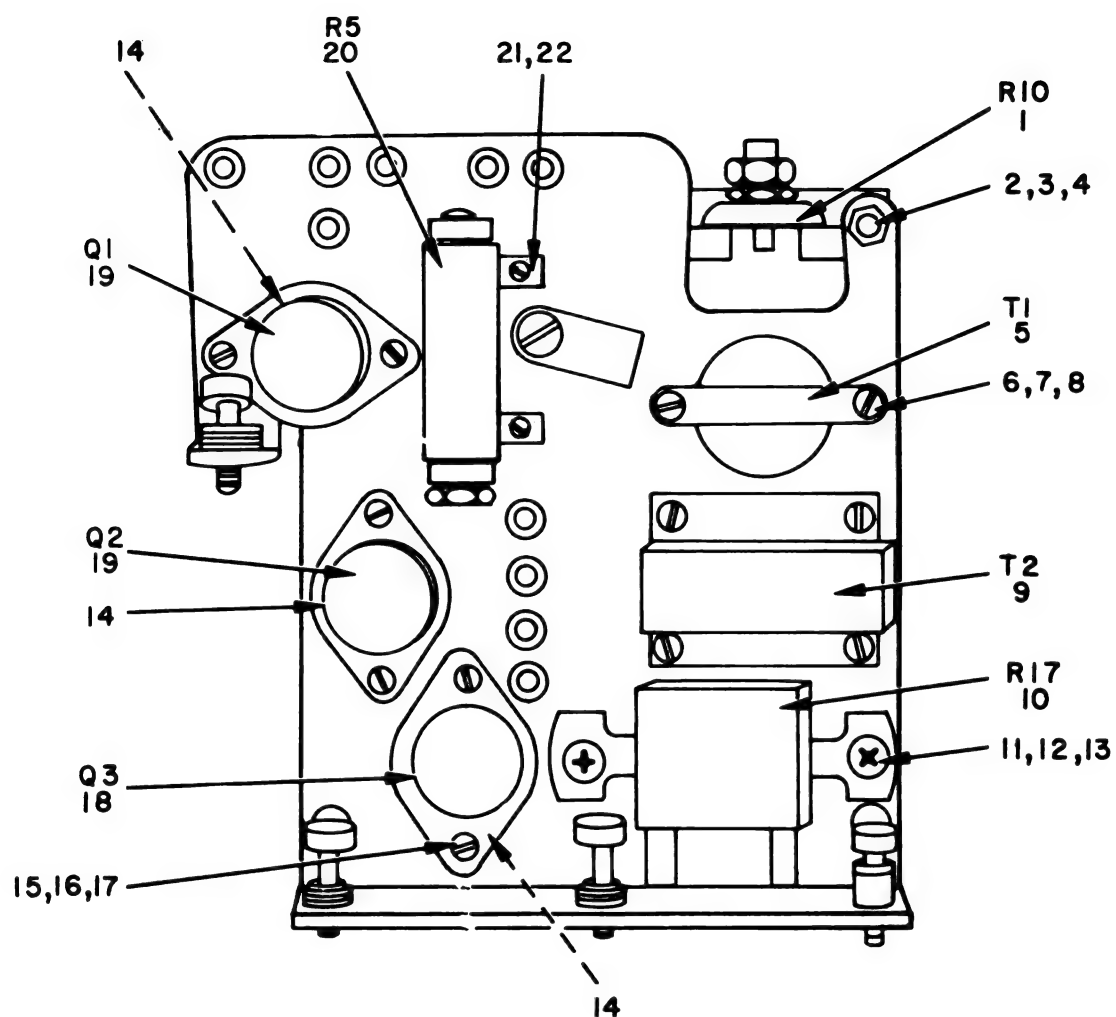


NOTE: FOR COMPLETE REFERENCE
DESIGNATION PREFIX WITH A1A4

EL2EH009

Figure 9. Module Assembly (A1A4).

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
						GROUP 020104 MODULE ASSEMBLY (A1A4)		
9	1	PAFZZ	5905-00-661-8688	RV4LAYCA590A	81349	RESISTOR, VARIABLE	EA	1
9	2	XDFZZ		SMB454878-1	80063	SCREW, EXTERNALLY RELIEVED	EA	4
9	3	XDFZZ	5310-00-809-8546	MS27183-8	96906	WASHER, FLAT	EA	4
9	4	XDFZZ		MS25337-43	96906	WASHER, SPECIAL	EA	4
9	5	PAFZZ	5950-00-980-9310	SMB454827	80063	TRANSFORMER, AUDIO FREQUENCY	EA	1
9	6	XDFZZ	5310-00-811-6419	MS21042-04	96906	NUT, SELF LOCKING	EA	8
9	7	XDFZZ		MS25223-16	96906	SCREW, MACHINE, PAN HEAD	EA	5
9	8	XDFZZ	5310-00-950-1310	MS27183-4	96906	WASHER, FLAT	EA	10
9	9	PAFZZ	5950-00-980-9309	SMB454828	80063	TRANSFORMER, AUDIO FREQUENCY	EA	1
9	10	PAFZZ	5905-00-889-0371	RW20V650	81349	RESISTOR, FIXED, WIRE WOUND	EA	1
9	11	XDFZZ	5310-00-807-1466	MS21042-08	96906	NUT, SELF LOCKING	EA	4
9	12	XDFZZ		MS35223-48	96906	SCREW, MACHINE, PAN HEAD	EA	2
9	13	XDFZZ	5310-00-809-8544	MS27183-7	96906	WASHER, FLAT	EA	4
9	14	PAFZZ	5970-00-986-0379	SMB454843	80063	INSULATOR PLATE	EA	3
9	15	XDFZZ		SMB454850	80063	BUSHING SLEEVE	EA	6
9	16	XDFZZ		MS35223-18	96906	SCREW, MACHINE, PAN HEAD	EA	6
9	17	XDFZZ	5310-00-951-4679	MS27183-3	96906	WASHER, FLAT	EA	6
9	18	PAFZZ	5961-00-857-6133	USA2N1489	81349	TRANSISTOR	EA	1
9	19	PAFZZ	5961-00-821-8976	USA2N297A	81349	TRANSISTOR	EA	2
9	20	PAFZZ	5905-00-843-2633	RW31V6R2	81349	RESISTOR, FIXED, WIRE WOUND	EA	1
9	21	XDFZZ		MS25223-54	96906	SCREW, MACHINE, PAN HEAD	EA	2
9	22	XDFZZ		SMB454849	80063	WASHER, RESISTOR MOUNTING	EA	2

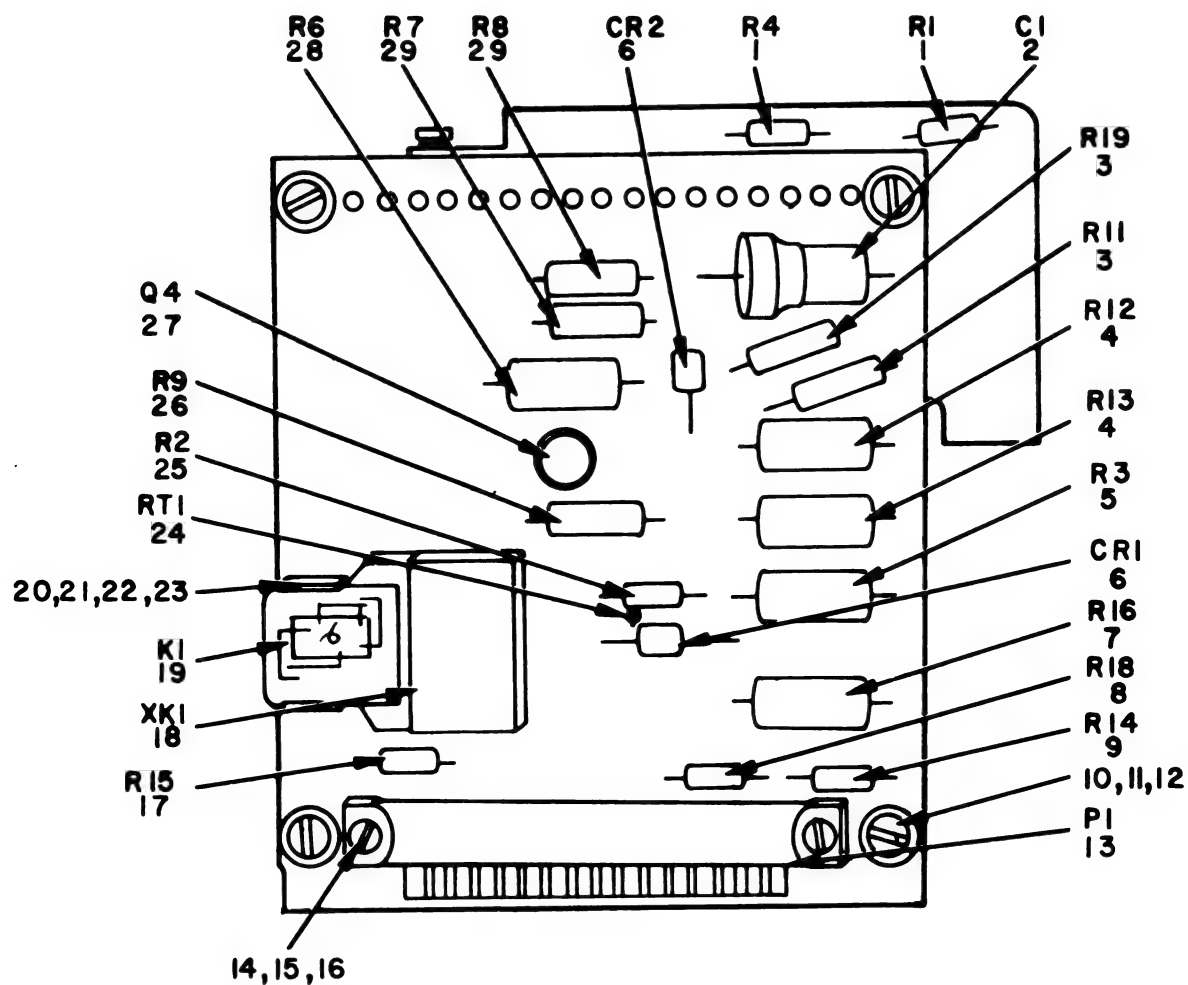

EL2EH010

Figure 10. Terminal Board Assembly (A1A4A1).

SECTION II

TM11-5820-498-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCN	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 02010401 TERMINAL BOARD ASSEMBLY (A1A4A1)		
10	1	PADZZ	5905-00-185-8510	RC20GF103J	81349	RESISTOR, FIXED, COMPOSITION	EA	2
10	2	PADZZ	5910-00-892-7728	CL65BJ600KPE	81349	CAPACITOR, FIXED, ELECTROLYTIC	EA	1
10	3	XDDZZ		RC32GF330J	81349	RESISTOR, FIXED, COMPOSITION	EA	2
10	4	PADZZ	5905-00-279-1977	RC42GF105J	81349	RESISTOR, FIXED, COMPOSITION	EA	2
10	5	PADZZ	5905-00-256-3361	RC42GF102J	81349	RESISTOR, FIXED, COMPOSITION	EA	1
10	6	PADZZ	5961-00-883-8906	USN1N3016B	81349	SEMICONDUCTOR DEVICE, DIODE	EA	2
10	7	PADZZ	5905-00-279-1937	RC42GF200J	81349	RESISTOR, FIXED, COMPOSITION	EA	1
10	8	PADZZ	5905-00-171-2004	RC20GF223J	81349	RESISTOR, FIXED, COMPOSITION	EA	1
10	9	PADZZ	5905-00-299-1541	RC20GF151J	81349	RESISTOR, FIXED, COMPOSITION	EA	1
10	10	XDDZZ	5310-00-807-1466	MS21042-08	96906	NUT, SELF LOCKING	EA	4
10	11	XDLZZ		MS35223-49	96906	SCREW, MACHINE, PAN HEAD	EA	4
10	12	XDDZZ	5310-00-809-8544	MS27183-7	96906	WASHER, FLAT	EA	8
10	13	PADZZ	5935-00-973-1896	SHD454841	80063	CONNECTOR, PLUG, ELECTRICAL	EA	1
10	14	XDDZZ	5310-00-722-5284	MS35649-42	96906	NUT, PLAIN, HEXAGON	EA	2
10	15	XDDZZ		AN9604	88044	WASHER, FLAT	EA	2
10	16	XDDZZ	5310-00-543-2410	MS35338-40	96906	WASHER, LOCK	EA	2
10	17	PADZZ	5905-00-195-6453	RC20GF562J	81349	RESISTOR, FIXED, COMPOSITION	EA	1
10	18	PADZZ	5935-00-892-9115	SMC454833	80063	SOCKET, RELAY	EA	1
10	19	PADZZ	5945-00-951-9880	SMC447566	80063	RELAY SWITCH	EA	1
10	20	XDDZZ		NAS13974	80205	CLAMP, LOOP	EA	1
10	21	XDDZZ	5310-00-807-1465	MS21042-06	96906	NUT, SELF LOCKING	EA	1
10	22	XDDZZ		MS35233-30	96906	SCREW, MACHINE, PAN HEAD	EA	1
10	23	XDDZZ	5310-00-983-8483	MS27183-5	96906	WASHER, FLAT	EA	2
10	24	PADZZ	5905-00-978-8551	SHB454844	80063	THERMISTOR	EA	1
10	25	PADZZ	5905-00-195-5546	RC20GF390J	81349	RESISTOR, FIXED, COMPOSITION	EA	1
10	26	PADZZ	5905-00-279-2637	RC32GF470J	81349	RESISTOR, FIXED, COMPOSITION	EA	1
10	27	PADZZ	5961-00-988-1290	USA2N1481	81349	TRANSISTOR	EA	1
10	28	PADZZ	5905-00-279-1922	RC42GF271J	81349	RESISTOR, FIXED, COMPOSITION	EA	1
10	29	PADZZ	5905-00-101-7586	RC32GF477J	81349	RESISTOR, FIXED, COMPOSITION	EA	2

SECTION IV

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

TM11-5420-498-34P

NOTE: LATEST NATIONAL STOCK NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5310-00-113-4530	3	8	5905-00-443-2633	9	20
5310-00-002-1404	2	9	5435-00-453-6673	5	1
5405-00-101-7586	10	29	5901-00-857-6133	9	19
5405-00-171-2004	10	8	5435-00-877-2134	2	18
5405-00-185-8510	10	1	5961-00-883-8906	10	6
5405-00-195-5546	10	25	5905-00-883-0371	9	10
5405-00-195-6453	10	17	5945-00-883-1061	1	2
5310-00-198-3724	3	10	5305-00-889-3060	6	3
5310-00-205-8261	4	6	5999-00-892-8122	1	4
5310-00-205-8261	7	1	5949-00-892-8123	4	1
5905-00-250-3361	10	5	5935-00-892-9115	10	10
5405-00-279-1922	10	28	5935-00-892-9119	2	11
5405-00-279-1937	10	7	5935-00-892-9120	2	16
5405-00-279-1977	10	4	5310-00-924-5968	3	4
5905-00-279-2637	10	26	5310-00-950-1310	9	8
5405-00-299-1541	10	9	5310-00-951-4679	9	17
5820-00-444-2328	2	2	5945-00-951-9880	10	14
5305-00-543-2188	1	5	5310-00-957-7579	6	5
5305-00-543-2192	2	7	3120-00-973-1508	7	2
5310-00-543-2410	10	16	5330-00-973-1727	6	6
5310-00-616-3555	3	3	5820-00-973-1728	2	1
5355-00-616-9659	4	11	5935-00-973-1896	10	13
5430-00-655-1515	4	9	5965-00-978-8535	4	3
5405-00-601-8488	9	1	5905-00-978-8551	10	24
5430-00-609-6786	4	8	5310-00-978-8573	4	7
5310-00-722-5284	10	14	5310-00-978-8573	7	3
5310-00-807-1455	10	21	5930-00-980-7244	4	10
5310-00-807-1466	9	11	5340-00-980-7281	6	2
5310-00-807-1466	10	10	5950-00-980-9309	9	9
5310-00-809-8544	2	5	5950-00-980-9310	9	5
5310-00-809-8544	2	13	5305-00-983-8314	8	1
5310-00-809-8544	9	13	5310-00-983-8483	10	23
5310-00-809-8544	10	12	5970-00-986-0579	9	14
5310-00-809-8546	9	3	5961-00-988-1290	10	27
5310-00-811-6419	9	6	5305-00-988-6265	7	6
5461-00-821-8976	9	19	5965-00-994-4334	4	4
5910-00-825-7342	3	1			

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
AM2060AGRC	80058	1	1	MS35337-42	96906	2	14
AN960PD8L	88044	2	9	MS35337-43	96906	6	4
AN9604	36044	10	15	MS35337-43	96906	9	4
CK62AX222K	81349	3	1	MS35338-40	96906	10	16
CL65BJ600KPE	81349	10	2	MS35649-42	96906	10	14
CL65BJ820KPE	81349	5	3	MS35649-62	96906	3	8
CX4655GRC	80058	1	2	MS91525-1	96906	4	11
MS21042-04	96906	9	6	NAS13974	80205	2	3
MS21042-06	96906	10	21	NAS13974	80205	10	20
MS21042-05	96906	9	11	RC20GF103J	81349	10	1
MS21042-08	96906	10	10	RC20GF151J	81349	10	9
MS25031-1	96906	5	4	RC20GF223J	81349	10	8
MS25223-1C	96906	9	7	RC20GF390J	81349	10	25
MS27183-3	96906	9	17	RC20GF562J	81349	10	17
MS27183-4	96906	9	8	RC32GF330J	81349	10	3
MS27183-5	96906	10	23	RC32GF487J	81349	10	29
MS27183-6	96906	3	9	RC32GF470J	81349	10	26
MS27183-7	96906	2	5	RC42GF102J	81349	10	5
MS27183-7	96906	2	13	RC42GF105J	81349	10	4
MS27183-7	96906	9	13	RC42GF200J	81349	10	7
MS27183-7	96906	10	12	RC42GF271J	81349	10	28
MS27183-8	96906	9	2	RV4LAYSA500A	81349	9	1
MS35058-23	96906	4	9	RW20V650	81349	9	10
MS35223-10	96906	9	16	RW31V6K2	81349	9	20
MS35223-31	96906	4	5	SMB109142	80063	4	8
MS35223-32	96906	1	5	SMB447392	80063	7	2
MS35223-41	96906	2	7	SMB454823	80063	4	4
MS35223-43	96906	2	4	SMB454843	80063	9	14
MS35223-43	96906	2	12	SMB454844	80063	10	24
MS35223-43	96906	9	12	SMB454847-58	80063	6	2
MS35223-44	96906	10	11	SMB454849	80063	9	22
MS35223-54	96906	9	21	SMB454855	80063	4	1
MS35232-26	96906	3	2	SMB454856	80063	9	15
MS35233-30	96906	10	22	SMB454857	80063	2	15
MS35333-71	96906	3	3	SMB454875-5	80063	7	6
MS35337-41	96906	3	10	SMB454875-6	80063	4	2
MS35337-42	96906	2	6	SMB454875-7	80063	7	4
MS35337-42	96906	2	8	SMB454875-8	80063	1	6

SECTION IV

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

TM 11-5820-498-34P

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SMB454876-2	80063	4	6	SMC454828	80063	9	9
SMB454876-2	80063	7	1	SMC454833	80063	10	18
SMB454876-4	80063	7	7	SMC454861	80063	8	1
SMB454876-5	80063	7	8	SMC454866	80063	8	2
SMB454876-6	80063	8	3	SMC454871	80063	6	6
SMB454876-7	80063	4	7	SMD454805	80063	2	2
SMB454876-7	80063	7	3	SMD454812	80063	4	3
SMB454877	80063	2	10	SMD454813	80063	7	9
SMB454878-1	80063	9	2	SMD454814	80063	4	10
SMB454881	80063	7	5	SMD454826	80063	2	1
SMB454887	80063	1	4	SMD454841	80063	10	13
SMB454888	80063	6	9	SMD454842	80063	2	16
SMB454893	80063	3	6	SMD454862	80063	3	7
SMB454894	80063	3	5	SMD454864	80063	6	1
SMC146776	80063	5	2	SMD454865	80063	1	7
SMC146777	80063	2	17	SMD454869	80063	1	3
SMC447566	80063	10	19	SMD454878-2	80063	6	3
SMC447928	80063	2	11	USA2N1481	81349	10	27
SMC454807	80063	2	18	USA2N1489	81349	9	18
SMC454808	80063	5	1	USA2N297A	81349	9	19
SMC454818	80063	8	4	USN1N3016B	81349	10	6
SMC454827	80063	9	5				

LATEST NATIONAL STOCK NUMBER ASSIGNMENT

STOCK NUMBER	FIGURE NO.	ITEM NO.
5910-00-005-3184	5	3
5910-00-892-7728	10	2

LATEST PART NUMBER ASSIGNMENT

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
1N4720	80131	5	4

ADDITIONAL LATEST NATIONAL STOCK NUMBER ASSIGNMENT

STOCK NUMBER	FIGURE NO.	ITEM NO.
5961-00-904-2019	5	4

By Order of the Secretary of the Army:

FRED C. WEYAND
General, United States Army
Chief of Staff

Official:
PAUL T. SMITH
Major General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-51, Direct and General Support requirements for AN/VRC-53, AN/VRC-64, AN/GRC-125, AN/GRC-160.

★ U.S. GOVERNMENT PRINTING OFFICE: 1990 - 277-371/28837

SOMETHING WRONG WITH THIS MANUAL?



THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703

DATE 10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-12

DATE

23 Jan 74

TITLE

Radar Set AN/SPC-76

BE EXACT...PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PAGE NO.	PARA- GRAPH	FIGURE NO.	TABLE NO.
-------------	----------------	---------------	--------------

2-25

2-28

Recommend that the installation antenna alignment procedure be changed throughout to specify a 2° IFF antenna lag rather than 1°.

REASON: Experience has shown that with only a 1° lag, the antenna servo system is too sensitive to wind gusting in excess of 25 knots, and has a tendency to rapidly accelerate and decelerate as it hunts, causing strain to the drive train. Hunting is minimized by adjusting the lag to 2° without degradation of operation.

3-10

3-3

3-1

Item 5, Function column. Change "2 db" to "3db."

REASON: The adjustment procedure for the TRANS POWER FAULT indicator calls for a 3 db (500 watts) adjustment to light the TRANS POWER FAULT indicator.

5-6

5-8

Add new step f.1 to read, "Replace cover plate removed in step e.1, above."

REASON: To replace the cover plate.

FO3

Zone C 3. On J1-2, change "+24 VDC to "+5 VDC."

REASON: This is the output line of the 5 VDC power supply. + 24 VDC is the input voltage.

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SSG I. M. DeSpirito 999-1776

SIGN HERE:

DA FORM 2028-2 (TEST)

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND" MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

HISA 1686-75

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander
US Army Communications-Electronics Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, NJ 07703

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?



THEN... JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, CAREFULLY TEAR IT
OUT, FOLD IT AND DROP IT
IN THE MAIL!

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-5820-498-34P

PUBLICATION DATE

2 Sep 76

PUBLICATION TITLE

Radio Sets

BE EXACT... PIN-POINT WHERE IT IS

PAGE
NO.

PARA-
GRAPH

FIGURE
NO.

TABLE
NO.

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG PERFORATED LINE

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 2028-2
1 JUL 75

PREVIOUS EDITIONS
ARE OBSOLETE.

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR
RECOMMENDATION MAKE A CARBON COPY OF THIS
AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander
US Army Communications-Electronics Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, NJ 07703

1



